SIZE	'A'	'B'	'C'	'D'	'E'	SET SCREW QTY & SIZE
−16X	1.000	1.562	1.687	.125	.172	(3) x 1/4"
−18	1.125	1.687	1.562	↕	.172	(3) x 1/4"
−20X	1.250	1.812	1.687	↕	.172	(3) x 1/4"
−22	1.375	1.937	1.750	.125	.188	(3) x 1/4"
−24X	1.500	2.170	↕	.164	.188	(3) x 1/4"
−26	1.625	2.295	↕	↕	.188	(3) x 1/4"
−28	1.750	2.420	↕	↕	.188	(3) x 1/4"
−30	1.875	2.545	↕	↕	.188	(3) x 1/4"
−32	2.000	2.670	↕	↕	.188	(3) x 1/4"
−34	2.125	2.795	1.750	↕	.188	(3) x 1/4"
−36	2.250	2.920	1.875	↕	.188	(3) x 1/4"
−38	2.375	3.045	↕	↕	.188	(3) x 1/4"
−40	2.500	3.187	↕	↕	.188	(3) x 1/4"
−42	2.625	3.312	↕	↕	.188	(4) x 1/4"
−44	2.750	3.437	↕	.164	.188	(4) x 1/4"
−46	2.875	3.625	↕	.190	.188	(6) x 1/4"
−48	3.000	3.750	↕	↕	.188	(6) x 1/4"
−50	3.125	3.875	↕	↕	.188	(6) x 1/4"
−52	3.250	4.000	↕	↕	.188	(6) x 1/4"
−54	3.375	4.125	↕	↕	.188	(6) x 1/4"
−56	3.500	4.250	↕	↕	.188	(6) x 1/4"
−58	3.625	4.375	↕	↕	.188	(6) x 1/4"
−60	3.750	4.500	↕	↕	.188	(6) x 1/4"
−62	3.875	4.625	↕	↕	.188	(6) x 1/4"
−64	4.000	4.750	1.875	.190	.188	(6) x 1/4"
−66	4.125	5.125	2.000	.250	.188	(6) x 1/4"
−68	4.250	5.125	↕	↕	.188	(6) x 1/4"
−70	4.375	5.375	↕	↕	.188	(6) x 1/4"
−72	4.500	5.375	↕	↕	.188	(6) x 1/4" (4)
−74	4.625	5.625	↕	↕	.188	(6) x 1/4"
−76	4.750	5.625	2.000	.250	.188	(6) x 1/4"
					(3)	(3)

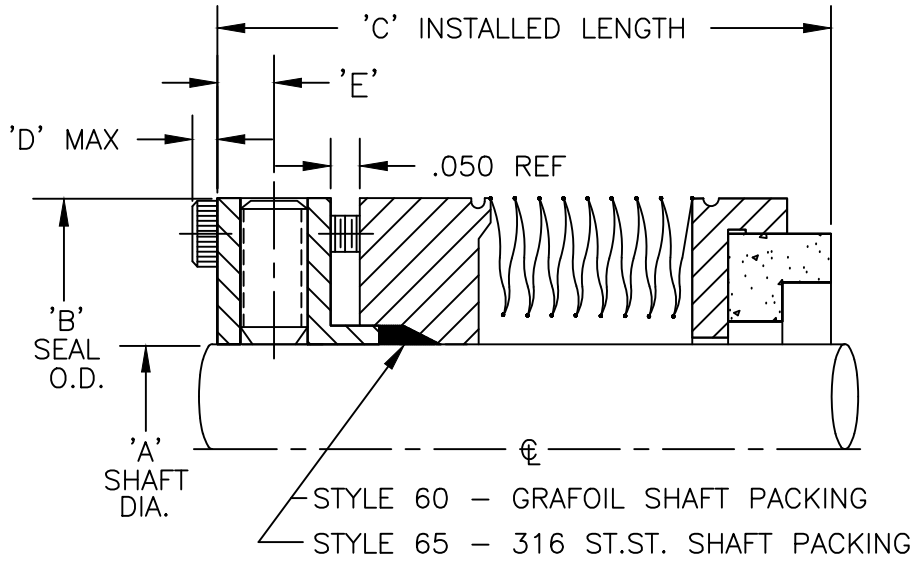

STANDARD METALLURGY

BELLOWS– AM350 HEAT TREATED
RETAINER– CARPENTER 42
METAL PARTS– 316 STAINLESS STEEL

STANDARD FACE MATERIALS

–CARBON
–SILICON CARBIDE
–TUNGSTEN CARBIDE

REV	ECN#	DATE	REV BY
3	1676	9/7/05	JK
4	2350	3/21/12	KG

REV.2–REVISED –16X,–20X, AND –24X SIZES
–ADDED –66, –70 TO –76 SIZES 8/3/94 C.B.

STYLE 60/65

HIGH TEMPERATURE
WELDED METAL
BELLOWS SHAFT SEAL

FLEX–A–SEAL,INC.
1 JACKSON ST. ● P.O. BOX 184
ESSEX JUNCTION, VT 05453
802–878–8307

SK1019 REV. **4**