Flex-A-Seal

Seal Application Data Sheet

E-mail to: applications@flexaseal.com
One Jackson Street / Essex Jct., VT 05452
Tel: +1 (802) 878-8307 / Fax: +1 (802) 878-2479

Date:_____

Distributor:		Contact:		Tel.:	
Customer:			Contact:		
Location:		E-mail:		Tel.:	

Operating & Product Information

Product Description, % Concentrations, PH-value if applicable:

Specific Gravity:		**% Solids in Fluid:**		**Operating Temperature:**	
Vapor Pressure:		**Solid Size:**		**Min/Max Temperature:**	
Viscosity:		**Batch/Cont. Run:**		**Shaft Speed [RPM]:**	
				Seal Chamber Pressure:	
				Suction Pressure:	
				Discharge Pressure:	

Fluid Characteristics:

☐ Clean ☐ Dirty ☐ Abrasive ☐ Crystallizing
☐ Toxic ☐ Corrosive ☐ Hardening

Addtl. Notes:

Equipment Information:

☐ Pump ☐ Mixer ☐ Other:

Manufacturer:		
Model:	**Size:**	
Sleeve Material:	**Casing Material:**	**# of Stages:**
Seal Chamber Modification:	**Jacketed Box:**	

Shaft Rotation Viewed From Motor End:

Equipment Orientation:

☐ Horizontal
☐ Horizontal Split
☐ Vertical
☐ Vertical Split

Seal Chamber Type:

☐ Standard Bore
☐ Big Bore
☐ Taper Bore
☐ Other:

Equip. Item Number:

Seal Chamber Dimensional Information:

ALL dimensions in CAPS are critical.

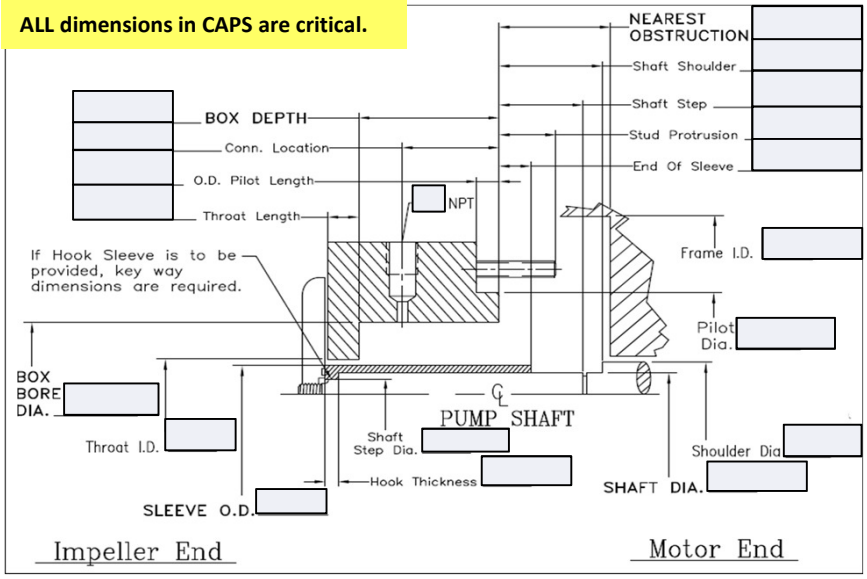

Environmental Controls:

API or ANSI Piping Plan:	
Buffer/Barrier Fluid with Concentrations:	
Barrier/Buffer Viscosity:	
Barrier Fluid Pressure:	
Barrier/Buffer Fluid Temp:	
Fluid Circulation G.P.M. :	
Reservoir Size:	
Reservoir w/ Cooling Coils:	

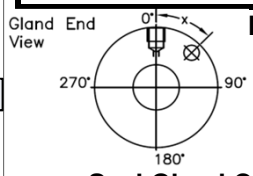

Bolt Circle Diameter:	
Stud Size:	
QTY:	
X, Spacing:	

Seal Gland Connection Angles 0-360° CW:

F/V/D: **Bi/ Bo:**

Existing Sealing Method:	**Seal Manufacturer:**		**Model:**
Seal Materials:		**Seal Dwg# attached:**	
Cause of Failure:			
Addt'l Notes:			

Providing Fluid Sealing Solutions worldwide for over 30 years
www.flexaseal.com