


SIZE	'A'	'B'	'C'	'D'	'E'	SET SCREW QTY & SIZE
-16X	1.000	1.562	1.687	.125	.172	(3) x 1/4"
-18	1.125	1.687	1.562	↑	.172	(3) x 1/4"
-20X	1.250	1.812	1.687	↓	.172	(3) x 1/4"
-22	1.375	1.937	1.750	.125	.188	(3) x 1/4"
-24X	1.500	2.170	↑	.164	.188	(3) x 1/4"
-26	1.625	2.295	↑	↑	.188	(3) x 1/4"
-28	1.750	2.420	↓	↓	.188	(3) x 1/4"
-30	1.875	2.545	↓	↓	.188	(3) x 1/4"
-32	2.000	2.670	↓	↓	.188	(3) x 1/4"
-34	2.125	2.795	1.750	↓	.188	(3) x 1/4"
-36	2.250	2.920	1.875	↓	.188	(3) x 1/4"
-38	2.375	3.045	↑	↓	.188	(3) x 1/4"
-40	2.500	3.187	↑	↓	.188	(3) x 1/4"
-42	2.625	3.312	↑	↓	.188	(4) x 1/4"
-44	2.750	3.437	↑	.164	.188	(4) x 1/4"
-46	2.875	3.625	↑	.190	.188	(6) x 1/4"
-48	3.000	3.750	↑	↑	.188	(6) x 1/4"
-50	3.125	3.875	↑	↑	.188	(6) x 1/4"
-52	3.250	4.000	↑	↑	.188	(6) x 1/4"
-54	3.375	4.125	↑	↑	.188	(6) x 1/4"
-56	3.500	4.250	↑	↑	.188	(6) x 1/4"
-58	3.625	4.375	↑	↑	.188	(6) x 1/4"
-60	3.750	4.500	↑	↑	.188	(6) x 1/4"
-62	3.875	4.625	↓	↓	.188	(6) x 1/4"
-64	4.000	4.750	1.875	.190	.188	(6) x 1/4"
-66	4.125	5.125	2.000	.250	.188	(6) x 1/4"
-68	4.250	5.125	↑	↑	.188	(6) x 1/4"
-70	4.375	5.375	↑	↑	.188	(6) x 1/4"
-72	4.500	5.375	↓	↓	.188	(6) x 1/4"
-74	4.625	5.625	↓	↓	.188	(6) x 1/4"
-76	4.750	5.625	2.000	.250	.188	(6) x 1/4"

③

③

④

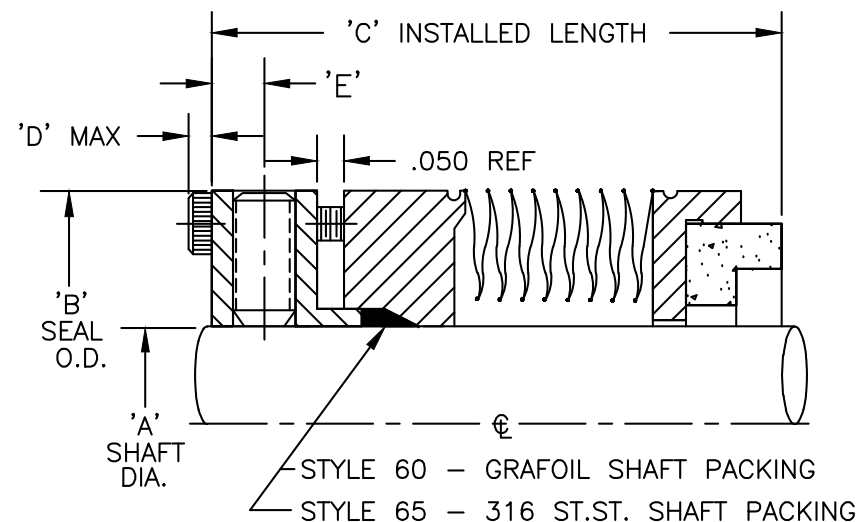

STANDARD METALLURGY

BELLOWS- AM350 HEAT TREATED
RETAINER- CARPENTER 42
METAL PARTS- 316 STAINLESS STEEL

STANDARD FACE MATERIALS

-CARBON
-SILICON CARBIDE
-TUNGSTEN CARBIDE

REV	ECN#	DATE	REV BY
3	1676	9/7/05	JK
4	2350	3/21/12	KG

REV.2-REVISED -16X,-20X, AND -24X SIZES
-ADDED -66, -70 TO -76 SIZES 8/3/94 C.B.

STYLE 60/65

HIGH TEMPERATURE
WELDED METAL
BELLOWS SHAFT SEAL

FLEX-A-SEAL, INC.

1 JACKSON ST. • P.O. BOX 184
ESSEX JUNCTION, VT 05453
802-878-8307

SK1019

REV.
4